GOLIA 200

The giant that amazes

An imposing and scenically impressive parasol designed to cover large areas up to 100 square meters with a single central pole. Made entirely of aluminum, Golia is an extremely robust covering system.

- Overs large spaces and terraces up to **100Sqm**

- Falls into the category of foldable mobile covers

- Suitable for particularly windy areas

USAGE OCCASIONS

BAR & ICECREAM SHOPS

HOTEL & RESORT

NAUTICAL

RESTAURANTS & FAST FOOD

POOLS AND BEACH RESORTS

CATERING & BANQUETTING

SKI & MOUNTAINS

GARDENS & TERRACES

FEATURES

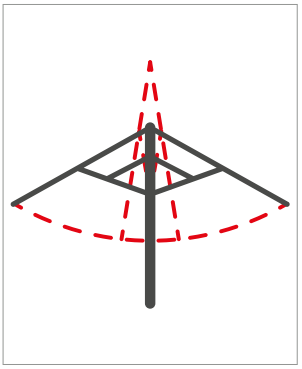

Telescopic opening for closing above tables



Apertura con **asta di manovra, arganello e vite senza fine a scomparsa**



THREADED CANVAS TECHNOLOGY with special aluminum alloy profile with nose cones that improves water and wind performance



Telaio in lega di **alluminio ad alta tenacità** verniciata a polvere epossidica con colore di serie bianco o manganese



TIG-welded aluminum rib port collars



Aluminum arm-rib joints for greater resistance and durability



MODULAR CANOPY
With interchangeable modular canvases in segments for easy replacement of even a single segment.

Available **perimeter volant** of 50cm

Stainless steel bolts and nuts

Central pole in round aluminum with diameter 200x5 Mm



Premium **PVC storage case**

Curved profiles in **aluminum 6005** 120x30x2 Mm

Also **available tailor-made**

GOLIA 200

HEIGHT OPTIONS

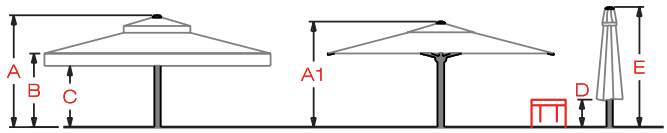

FRAME COLOR



TYPE OF FABRIC

PVC

Up to 900 gr/Sqm

PVC / PVC BLACKOUT *-PVC-*

NAUTICAL HP *-RES-*

SQUARED		A	A1	B	C	D	E	-BI-	-MA-	PVC / PVC BLACKOUT -PVC-	NAUTICAL HP -RES-
800 / 800	**12** Ribs **64** Sqm *GOLIA800X800*	501	481	310	260	**73**	656	○	●	✓	✓
900 / 900	**12** Ribs **76,50** Sqm *GOLIA900X900*	474	454	308	258	96	654	○	●	✓	✓
1000 / 1000	**16** Ribs **95,50** Sqm *GOLIA10X10*	515	445	331	281	**69**	695	○	●	✓	✓

RECTANGULAR		A	A1	B	C	D	E	-BI-	-MA-	PVC / PVC BLACKOUT -PVC-	NAUTICAL HP -RES-
900 / 800	**14** Ribs **72** Sqm *GOLIA900X800*	493	473	340	290	**64**	673	○	●	✓	✓
1100 / 900	**14** Ribs **94,50** Sqm *GOLIA11X9*	515	495	310	260	**72**	695	○	●	✓	✓

ROUND		A	A1	B	C	D	E	-BI-	-MA-	PVC / PVC BLACKOUT -PVC-	NAUTICAL HP -RES-
DIAM. 900	**12** Ribs **63,58** Sqm *GOLIADIAM.9M*	396	376	270	230	117	576	○	●	✓	✓
DIAM. 1000	**12** Ribs **78,50** Sqm *GOLIADIAM.10*	130	410	290	250	93	610	○	●	✓	✓
DIAM. 1100	**14** Ribs **95** Sqm *GOLIADIAM.11*	500	480	310	260	88	670	○	●	✓	✓

Frame RAL color -CO-

CUSTOM SIZES
Custom sizes for square/ rectangular parasols
-CONUGO-

fabric colors not in the collection -SUPTESS-

CUSTOM SHAPES
parasols with irregular shapes
-CONUGOC-

Half premium PVC Storage Case -FODPVC2-



AUTOMATIC VERSION



CODE -GOA-

- Automated opening and closing system for the parasol, operable with a remote control or fixed switch panel. Movement through an internal hydraulic cylinder activated by an electro-hydraulic control unit powered by low voltage (12 Volts), complete with manual emergency pump. Includes a 12 Volts / 60 A/h battery and electronic battery charger.

VOLANT





CLASSIC VOLANT VARIANTS

TRANSFER LETTERING ON VOLANT



MONOCHROME HEAT-SEALED
EXCLUDING GRAPHICS

⟷	200 Cm	100 Cm
↕	25 Cm	25 Cm
	-SCLOGO200-	-SCLOGO100-

TRANSFERT LETTERING ON SEGMENT

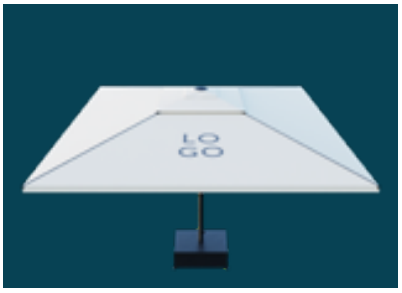

MONOCHROME HEAT-SEALED
ON SEGMENT
(inevitable slight fabric wrinkles),
EXCLUDING GRAPHICS

⟷	80 Cm
↕	80 Cm
	-SCLOGO8080-

COMPLEX AND/OR COLORED WRITINGS/LOGOS

GUTTER PREPARATION

With female Velcro hidden by fabric flap **OUTSIDE THE VOLANT.**

-APVELG-

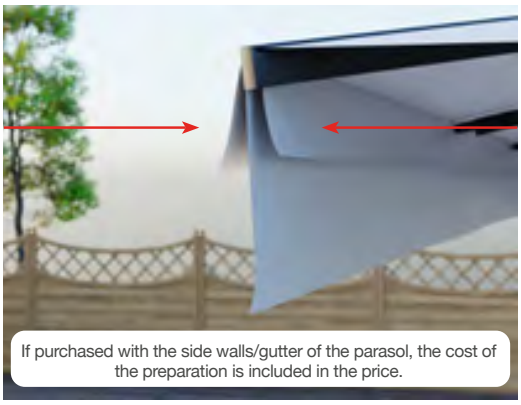

If purchased with the side walls/gutter of the parasol, the cost of the preparation is included in the price.

SIDE WALLS PREPARATION

With female Velcro hidden by fabric flap **INSIDE THE VOLANT.**

-APVELP-



UNION GUTTER APPLIED WITH REMOVABLE ZIPPER AND VELCRO

Made of PVC, with slope, and applied externally to the skirts. Version with buckles available upon request for umbrellas not predisposed.

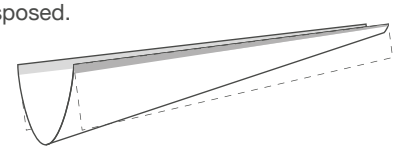

-GRO-



CENTRAL INTERSECTION CONE FOR 4 PARASOLS

Applied with bracket on a corner rib.



-CONO-

WINTER EQUIPMENT

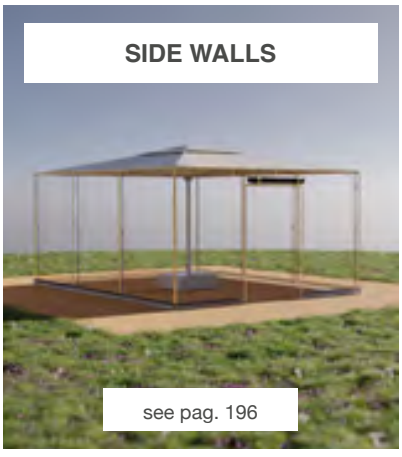

SIDE WALLS

see pag. 196

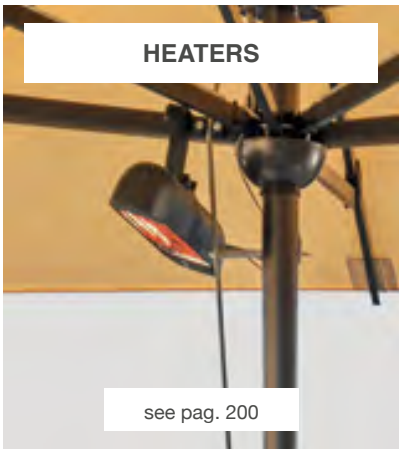

HEATERS

see pag. 200



PREPARATION FOR HEATER'S CABLE PASSAGE

- PASCAV -

SUPPORT BASES

The base recommended in our price list takes into account the square meters of the parasol and a theoretical overturning coefficient of approximately 50 km/h with constant wind. Such recommendation does not constitute any guarantee by the manufacturer, as it is indeed difficult to measure whether there are gusts in a specific location. Therefore, it is always recommended to close the parasol in case of bad weather. In particularly windy areas, we always advise securing the parasol to the ground.

GROUND BASE





Adjustable leveling feet

White -BI-

Manganese -MA-

Ral Selection -CO-

UP TO 70 SQM

In galvanized and painted steel. Prepared to accommodate **56** washed stone PLATES.

130x130 cm	30 cm	50 kg	130x135 x26 Cm

CODE -BAGOLTEL130-

PLATES COVER CARTER



White -BI-

Manganese -MA-

Ral Selection -CO-

135x135 Cm

In painted aluminum.

49 cm	45 kg	140x75 x50 Cm

CODE -CAR135-

SERVICE TABLE COVER CASE



White -BI-

Manganese -MA-

Ral Selection -CO-

140x140 Cm

With a top in **galvanized and painted steel** and **walls in fabric**. Mandatory if purchasing the automatic version.

52 cm	33 kg	145x75 x35 Cm

CODE -GOTAVD20-

SET OF 56 PLATES
UP TO 70 SQM



Set of 40 plates 50x50 and 16 40x40 plates

50x50+ 40x40 Cm

In washed stone

4 cm	1080 kg	120x100 x66 Cm

CODE -LAS56X50-



FIXING BASES

THE USE OF ANCHORING DOWELS presupposes a careful evaluation of the conditions of the surface to be drilled, which must be at least 200*x200x20 cm in size. We highly recommend* performing a core drilling in advance to check for the presence and thickness of uncracked concrete.

We do not recommend anchoring with dowels on other types of surfaces such as asphalt, cobblestones, on terraces, garage floors, etc., even with the help of chemical adhesives. Please verify the absence of pipes, electrical cables, and insulation sheaths in the ground before drilling.

FIXED BASE

White -BI-

Manganese -MA-

Ral Selection -CO-





50x50 Cm

In galvanized and painted steel.
20 mm plugs of variable length (not supplied).

30 cm	48 kg	55x55 x40 Cm

CODE -BAGOLTEL5-

COVER CASE
FOR MOTORIZED VERSION

- MANDATORY -



White -BI-

Manganese -MA-

Ral Selection -CO-

50x70 Cm

For motorized operated parasol

52 cm	19 kg	52x50 x40 Cm

CODE -BAGOL70D200-

COVER CASE
FOR MANUAL VERSION





White -BI-

Manganese -MA-

Ral Selection -CO-

51x51 Cm

For manual opening parasol Necessary if you purchase bottom-powered LEDs.

25 cm	10 kg	52x25 x27 Cm

CODE -BAGOL50D200-

SET OF 4 GROUND ANCHORS





To be embedded in an uncracked concrete pour of variable dimensions depending on the size of the parasol and the installation location for a fixed base.

12 mm	45 cm	10 kg	30x50 x5 Cm

CODE -TIRGO200-



The LEDs we use are Made In Italy and compliant with the Ecodesign 2021 directives

/ **100 cm LED bars** iin anodized aluminum

/ **Warm light** selected 2700 K
On request: cold light or RGB light kit (color change - 24 V)

/ **Wi-Fi receiver** with remote control, batteries, and dimmer (light intensity adjustment)

/ IP/67 Waterproof24V **power supply**

/ **IP65 Waterproof** 24 V 14 W/Mt

/ **Connector** socket and plug 3p Screw D5-12 IP66/IP68

*The length of the LED bars may be shorter for certain parasol sizes.

MADE IN ITALY

/ POSITIONING

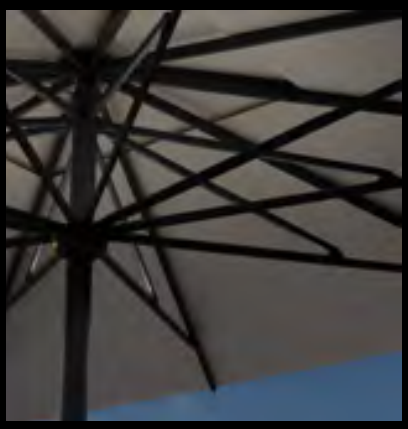











/ TOWARDS THE CANOPY

Recommended for a greater scenic effect on light-colored fabric.

STANDARD - LEDUP -

/ DOWNWARD

Recommended for greater illumination on the floor area.

STANDARD - LEDDOWN -

/ TOWARDS THE CANOPY + DOWNWARD

Independent lighting/intensity adjustment for above and below.

NOT- STANDARD - LEDMIX -

---

12 BARS



POWER SUPPLY
(270x70x40 Mm)
Qty: 1,240 Watt IP/67

CONSUMPTION
7.2 A

POWER
172.8 W

- VLD12X10060 -

14 BARS



POWER SUPPLY
(270x70x40 Mm)
Qty: 1,240 Watt IP/67

CONSUMPTION
8.4 A

POWER
201.6 W

- VLD14X10060 -

16 BARS



POWER SUPPLY
(270x70x40 Mm)
n° 2 da 150 Watt IP/67

CONSUMPTION
9.6 A

POWER
230.4 W

- VLD16X10060 -



RGB LED ADD-ON INFORMATION AND TECHNICAL DATA SHEET AVAILABLE UPON REQUEST

/ POWER SUPPLY

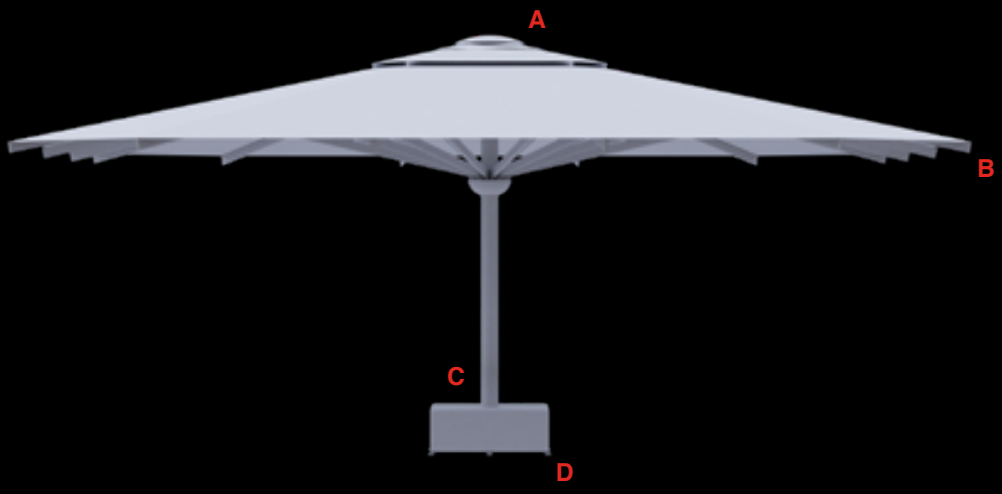

A - FROM THE TOP



If the cable is coming from a wall of the room, the parasol can be opened and closed without unplugging the power plug.

-ALCAP-

B - FROM THE RIB



Power supply from one of the slats of the parasol (it is necessary to indicate which slat the power cable will come from).

ATTENTION! To close the parsol it will be necessary to unhook the power plug.

-ALSTE-

C - POLE ABOVE BASE



If the cable is coming from the floor, the parasol can be opened and closed without unplugging the power plug.

-ALPALU-

D - POLE UNDER BASE



Aesthetically better solution as long as there is space to carry out the wiring underneath the flooring (e.g. floating floors, platforms or wells). The parasol can be opened and closed without unplugging the power plug.



-ALPALD-

LITHIUM BATTERY FOR LED 24V



*Approximate duration with 4 1m LED bars kept at maximum power: 6h

LEGEND

D = Distance from walls/other elements

⚠ **MINIMUM 15 CM** ⚠

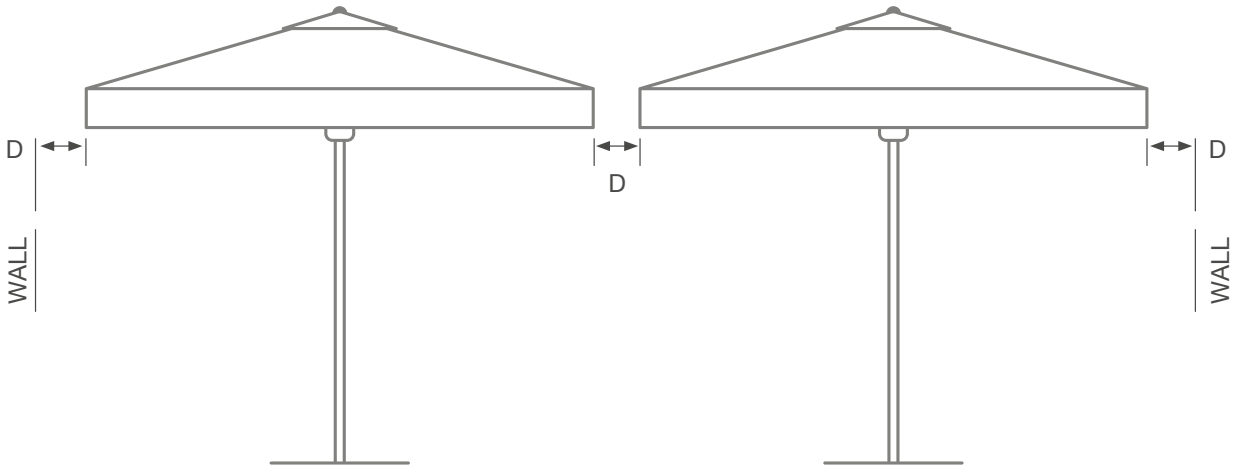



900x900*
12 st.



1000x1000*
16 st.



1100x900*
14 st.

⚠ SEE RECOMMENDATIONS ON TAKING MEASUREMENTS ⚠

PACKAGING

PARASOL OPEN SIZE (Cm)	CLOSED HEIGHT (Cm)	N° RIBS	INDICATIVE WEIGHT (Kg)
	SQUARED		
800x800	**656**	12	260 - 310
900x900	**654**	12	300 - 350
1000x1000	**695**	16	350 - 400
	RECTANGULAR		
900x800	**673**	14	300 - 350
1100x900	**695**	14	340 - 390
	ROUND		
Diameter 900	**576**	12	260 - 310
Diameter 1000	**610**	12	300 - 350
Diameter 1100	**670**	14	320 - 370

Weights are indicative and exclude base and packaging.
Packaging weights and dimensions may vary without notice.

STEEL CRATE FOR TRANSPORT



THE PARASOL IS TIED AND PACKAGED SUSPENDED TO AVOID DAMAGING THE FABRIC.

AUTOMATIC VERSION SHIPPED WITH THE BELLOWS DISASSEMBLED.

INSIDE, BASE AND MOTORIZATION ARE PLACED.

CRATE DIMENSIONS: 100x100x500 Cm - APPROXIMATELY 80 Kg.
Parasol always longer than the crate (see dimension E and technical sheet).

INCLUDED IN THE COST OF THE PARASOL -CASSACC-



For installation, it is necessary to use a crane with a minimum lift of 8 meters (see dimension E + Parasol weight).